



**PREMISES DEPARTMENT
ZONAL OFFICE MUMBAI SOUTH**

**TENDER FOR
INTERIOR FURNISHING WORK IN ALTERNATE PREMISES OF VASHI
SECTOR-17 BRANCH, NAVI MUMBAI UNDER ZO MUMBAI SOUTH**

**Ref.No : ZO MUM(S):PRM:2026-27:06
Date : 11/06/2026**

Last date for submission of Tender	25/06/2026 upto 17:00 HRS at Indian Bank, Zonal Office, Premises Department, 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai - 400001
Date of Opening of Tender	25/06/2026 at 17:30 HRS at Indian Bank, Zonal Office, Premises Department, 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai - 400001

**ARCHITECT
SANKALPA ASSOCIATES
ARCHITECTS & INTERIOR DESIGNERS
1001, Eleven Heights, Sant Gora Kumbhar Marg, Kumbharwada, Dharavi, Mumbai 400017**



ZONAL OFFICE – MUMBAI SOUTH

NOTICE INVITING TENDER

Indian Bank, Zonal Office Mumbai South invites sealed competitive bids from the established and reputed interior furnishing vendors empaneled in Indian Bank and having sound technical and financial capacity to do the Interior Furnishing Work in alternate premises of Vashi Sector-17 Branch, Navi Mumbai. The tender can be downloaded from the Bank's website (www.indianbank.bank.in) under Tender Column.

1	Name of work	Interior Furnishing Work in alternate premises of Indian Bank Vashi Sector-17 Branch, Navi Mumbai
2	Period of completion	20 days to be reckoned from 3 rd day from the date of issue of the Work Order or handing over of site whichever is later
3	Validity of Tender	90 Days from the date of opening
4	Defects Liability Period	12 Months from the date of virtual completion of work
5	Earnest Money Deposit	Rs.24,900/- (Rupees Twenty Four Thousand Nine Hundred Only) by way of DD in favour of Indian Bank payable at Mumbai *Firms registered with MSME / NSIC with valid certificates issued by GOI are exempted from submitting EMD along with bid.
7	Initial Security Deposit (ISD)	After acceptance of Work Order, Contractor shall submit ISD of 2% of the Bid / Contract Amount in the form of DD in the name of "Indian Bank" payable at Mumbai within 5 days from the date of allotment of work.
8	Retention Money (RM)	8% of the Bill Amount excluding Taxes
9	Total Security Deposit (TSD) = ISD + RM	10% of the Bid Amount (ISD – 2% & RM – 8%)
10	Release of Retention Money	Retention Money will be released within 30 days after satisfactory completion of defect liability period and defects free as per the contract clauses.
11	Interim / Adhoc Payment	Minimum value of work for Interim Payment is Rs.5 Lakhs or as decided by Bank. The interim payment / adhoc payment shall be 75% of the works executed at site. One interim bill is allowed during the entire course of the work. However, Bank is not bound to make the payment against the interim bill raised by Contractor.
12	Liquidated Damages	1% per week of the Contract Value subject to maximum total of 10% of final Contract value
13	Tender Documents	Tender documents can be obtained from the Bank's website (www.indianbank.bank.in) under Tenders column.
14	Last date for the submission of Tender	25/06/2026 upto 17:00 HRS at Indian Bank, Zonal Office, Premises Department, 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai – 400001
15	Date of opening of Tender	25/06/2026 at 17:30 HRS at Indian Bank, Zonal Office, Premises Department, 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai - 400001
16	Minimum Eligibility Criteria	1. Should be empanelled in Indian Bank <i>Kindly enclose valid Empanelment Letters.</i> 2. The Contractor/Vendor should be in same line of activity for at least last 5 Years in the Market ending on 31.03.2026.

		<i>Please furnish Work Order along with copy of tax invoice / Client's Completion Certificate to confirm the same.</i> 3. Should have Registered Office in Mumbai Metropolitan Region <i>Please furnish requisite document as proof.</i> 4. Should have carried out similar work of value in the last 3 years (ending 31.03.2026). At least : • Atleast one similar works of value not less than Rs.9.98 Lakhs each (OR) • Atleast two similar works of value not less than Rs.6.25 Lakhs each <i>Copy of Work Order / Completion Certificate showing value of work satisfying the above eligibility criteria is to be enclosed.</i> Similar works means: Interior Furnishing Work (Partition, Panelling, False Ceiling, Storage Cabinets etc) 5. Should have valid GST No. & PAN No <i>The bidders must satisfy the above criteria and furnish the relevant documents as proof. If the Vendors fails to provide relevant documents and meet the minimum eligibility criteria as mentioned above, Bank would disqualify the bidder without assigning any reason whatsoever.</i>
--	--	--

Note:

1. Vendors are required to submit the tender in sealed cover along with necessary documents. The envelope should be super-scribed 'Tender for Interior Furnishing Works to be carried out in Indian Bank Vashi Sector-17 Branch' and addressed to the Zonal Manager, Indian Bank, Zonal Office, Mumbai South, 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai – 400001.
2. Conditional bids, late bids, bids without EMD will be summarily rejected. Any bids received open, late or not meeting all the conditions / bids not filled up in Pen are liable to be rejected.
3. Earnest money will not carry any interest.
4. If any information furnished by the applicant is found incorrect at a later stage, he shall be liable to be debarred from taking up the work in Indian Bank.
5. The Bank reserves the right to verify the particulars furnished by the applicant independently.
6. Bank is not bound to accept the Lowest (L1) vendor and reserves the right to accept or reject any or all the bids without assigning any reason whatsoever.
7. Submission of this bid document by a bidder implies that he/she has read this notice and other documents and has made himself aware of the scope, specifications, conditions, liabilities and duties bearing on the execution of the contract.
8. Return of EMD of remaining bidders who were unsuccessful in the bidding process will be done within a reasonable time say not exceeding 7 days from the date of acceptance of tender submitted by the L1 bidder.
9. Each and every page of the document and correspondences accompanying this tender shall have to be duly signed and stamped by the Bidder / Authorised Signatory before submission.



10. The rates quoted by the bidder shall be based on the conditions of site and specifications mentioned in the tender.
11. Bank is not liable to make any payment to bidders for preparation to submit the tender.
12. Clarifications, if any, pertaining to this tender request may be referred to Indian Bank, Premises Department, Zonal Office Mumbai South through E-mail Id – **[zo.mumbai.expprem@ indianbank.co.in](mailto:zo.mumbai.expprem@indianbank.co.in)**

ZONAL MANAGER



FORM OF TENDER

The Zonal Manager
Indian Bank
Zonal Office Mumbai South

Dear Sir,

SUB: Invitation of Tender for Interior Furnishing Work in Vashi Sector-17 Branch

Having examined the drawings, specifications, conditions and schedule of quantities prepared by you, and satisfying ourselves as to the location of the site and working conditions, I/We hereby offer to execute the above works at the respective rates which I/We have quoted for the items in the Schedule of Quantities.

I/We further agree to complete the work within the stipulated time as specified by the Bank in this document.

I / We understand that Indian Bank is not bound to accept the lowest quote or bound to assign any reasons for rejecting our quote.

In the event of this bid being accepted, I/We agree to enter into and execute the necessary contract required by you. I/We do hereby bind myself/ourselves to forfeit the aforesaid Earnest Money Deposit of **Rs.24,900/- (Rupees Twenty Four Thousand Nine Hundred only)** in the event of our refusal or delay in signing the Contract Agreement.

I / We understand that Indian Bank may award the work to more than one Contractor and I / We shall make no claims whatsoever if Indian Bank accepts only a part of my / our bid.

I / We unconditionally agree to Indian Bank's conditions as stipulated in the Documents.

I/We agree to keep our bid open for **90 (Ninety) days** from the date of opening of bid.

I / We agree that incase of my / our failure to execute the work in accordance with the specifications and instructions received from the Bank during the course of the work, Bank reserves the right to terminate my work order and recover all the dues to the Bank from the payment receivable by me. Further, I may also be barred from participating in any type of bid or Tender invited by Bank or its subsidiaries in future.

Thanking you,

Yours faithfully,

[To be signed by the Authorized Representative of
Firm who has the Power to do so]

Place:

Date :

Name:

Address:

Seal:

GENERAL INFORMATION OF THE FIRM

1	Name of the Applicant / Firm / Organization	
2	Registered Address of the Firm	
3	CONTACT DETAILS Landline No - Mobile No - Email Id -	
4	EMD Details (i) Amount (Rs.) - (ii) Demand Draft No. - (iii) Name of the Bank - (iv) Date – <i>(Please submit EMD Details. If exempted, please submit requisite proof in the form of copy of self-attested valid certification from MSME and NSIC.)</i>	
5	Constitution of Firm	Sole Proprietorship / Partnership / Private Ltd. / Public Ltd / Any other (Please specify)
7	Name of the Proprietor/ Partners / Directors of the Organization / Firm	
8	Name/s of Authorized Signatory/ Directors / Partners	
9	Whether registered as MSME Organization?	YES / NO
10	Whether empanelled with Indian Bank <i>(Enclose Empanelment letter)</i>	YES / NO

11	Banker's Details – (Please attach copy of cancelled cheque as proof) (i) Banker's Name : (ii) Account No. : (iii) Type of Account : (iv) IFSC :	
12	Registration with the Government Authorities (Enclose certified copies of documents as evidence) If firm is exempt from ESI & EPF registration as per extant guidelines, fill N.A. and an undertaking is to be submitted stating the same.	
	a) Income Tax (PAN) No. ii) Goods & Service Tax (GST) No. iii) Labour License iv) ESI v) EPF	
13	Whether last three years IT returns filed	YES / NO
14	Information relating to whether any litigation is pending before any Arbitrator for adjudication of any litigation or else any litigation was disposed of during the last five years by an arbitrator. If so, the details of such litigation are required to be submitted.	
15	Has the applicant or any constituent partner in case of partnership firm/ Company, ever abandoned the awarded work before its completion? If so, give the name of the project and give reasons thereof.	
16	Has the applicant or any constituent partner in case of partnership firm / Company, ever been debarred/black listed for tendering in any organization at any time? If so, give details	



DECLARATION –

1. All the information furnished by me/us here above is correct to the best of my knowledge and belief.
2. I/We have no objection if enquiries are made about the work listed by me.
3. I/We agree that the decision of Indian Bank in selection of vendor will be final and binding to me/ us.
4. I/We hereby confirm that our firm/agency/company has not been disqualified / debarred / blacklisted by any Governments, Semi-governments, PSUs, and Banks including any of the Offices / Branch of Indian Bank Pan India during last 5 year from the date of application.
5. I/We hereby confirm that all information, particulars, copies of certificates and testimonials provided are correct and genuine. I am / We are, therefore, liable to face appropriate actions as deemed fit by the Indian Bank in the event of any of the information, particulars, copies of certificates and testimonials are not found correct and genuine. I/We have read the instructions appended to the proforma and I/we understand that if any false information is detected at a later date, the contract shall be cancelled at the discretion of the Indian Bank.

PLACE –

DATE –

SIGNATURE OF CONTRACTOR

NAME & DESIGNATION –

SEAL OF ORGANISATION -



GENERAL TERMS AND CONDITIONS

1. Definition of Terms / Interpretation:

- Employer/Owner/Bank /Indian Bank/ Accepting Authority shall mean Indian Bank with their Corporate Office at No. 254-260, Avvai Shanmugam Salai, Royapettah, Chennai – 600 014 inter-alia having their Zonal Office at 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai – 400001 and any of its employees representative authorized on their behalf.
- Throughout these bidding documents, the terms “bid” and “tender” are Synonymous.
- Day means calendar day. Singular also means plural
- “Contractor” means the person whose bid has been accepted by the Employer and the legal successors in title to such person, but not (except with the consent of the Employer) any assignee of such person.
- Bidder : The term ‘Bidder’ shall mean the individual or firm or company whether incorporated or not, undertaking the work and shall include legal representative(s) of such individuals or persons composing such firm or company or successors of such firm or company as the case may be and permitted assigns of such individual or firm or company.

2. Submission of Tender :

The Tender must be submitted in Original or as per details given here under.

Vendors are required to submit the tender in sealed cover along with necessary documents. The envelope should be super-scribed ‘Tender for Interior Furnishing Works in alternate premises of Indian Bank Vashi Sector-17 Branch ’ and addressed to the Zonal Manager, Indian Bank, Zonal Office, Mumbai South, 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai – 400001’.

3. Qualifying Criteria :

As given in Minimum Eligibility Criteria.

Additional Information –

Even though the bidders meet the above qualifying criteria, they are liable to be disqualified if they have :

- Submitted any misleading or false representation in the forms, statements and attachments in proof of the qualification requirements;
- Records of poor performance such as abandoning the work, not properly completing the contract, inordinate delays in completion, penalty, litigation history or financial failures etc.
- Their business banned by any Central or State Govt. Department / Public Sector Undertakings / Public Sector Bank’s
- Not submitted all the supporting documents or not furnished the relevant details.
- Any one of the partners (in case of partnership firm) or any Directors in case of Pvt Ltd., or Public Ltd firm being convicted by a Court of law.

4. Site Visit :

- The bidder is advised to visit (upon prior approval), and examine the Site of Works and its surroundings and obtain for itself on its own responsibility and cost all information that may be necessary for submitting the tender and entering into a contract for the Works as mentioned in tender document.
- The bidder and any of its personnel with authority letter will be granted permission by the Employer / Owner to enter upon its premises, but only upon the express condition that the bidder, its personnel, and agents, will release and indemnify the Employer/Owner and its personnel and



agents from and against all liability in respect thereof, and will be responsible for death or personal injury, loss of or damage to property, and any other loss, damage, costs, and expenses incurred as a result of the inspection.

- Before submitting the Bid, the bidder shall be deemed to have satisfied himself by actual inspection of the site and locality of the works, Traffic conditions / restrictions, Availability of parking space, Transportation of materials that all conditions liable to be encountered during the execution of the works are taken into account and that the quoted rates are adequate and all inclusive for the completion of work to the entire satisfaction of the Employer/Owner.

5. The Indian Bank does not bind itself to accept the lowest bid and reserves to itself the right of accepting the whole or any part of the tender and the firm shall be bound to perform the same at the rate mentioned.
6. The rate quoted by the firm shall be net (excluding GST), up to the stage of incorporation and handing over site. All taxes including (excluding GST) or any other tax on material or on finished works like Turn-over Tax, including taxes that may be newly introduced subsequent to the bid etc. in respect of this work shall be payable by the Firm and Indian Bank will not entertain any claim whatsoever in this respect.

The rate quoted should be excluding GST.

The firm who wishes to bid for the above job should have GST registration and should mention the registration number.

7. The firms will have to deposit an EMD amount of **Rs.24,900/- (Rupees Twenty Four Thousand Nine Hundred Only)** in the form of Demand Draft from scheduled commercial bank in India drawn in favour of "Indian Bank," payable at Mumbai. Please note that firms registered with MSME / NSIC under single point registration with valid certificates issued by GOI are exempted from submitting EMD. Necessary Certificates must accompany bid. No other type of certificate is acceptable. The exemption and relaxation in EMD is subject to the validity & acceptance of their registration certificate on the date of opening of tender.

No interest on Earnest Money deposited by the bidder shall be allowed. No other mode of payment shall be accepted. The Earnest Money Deposit of unsuccessful bidder shall be refunded within 7 days of award of contract to the successful bidder. The Earnest Money Deposit of the successful bidder shall be refunded on the acceptance by the Employer of the Contractor's Demand Draft towards Initial Security Deposit. The EMD of the bidder, whose bid is accepted, shall be forfeit in full in case he does not start the work by stipulated date mentioned in the award letter.

Apart from EMD & ISD, **the retention amount shall be deducted from progressive running bill at 8% on the gross value of each running bill paid will be held by the Indian Bank apart from ISD until the total security deposit equals 10% of project cost.**

8. Initial Security Deposit

The bidder will have to deposit an amount of 2% of Contract amount in the form of Demand Draft from Scheduled Commercial Bank in India drawn in favour of "Indian Bank," payable at Mumbai within 5 days from the date of receipt of work order as an Initial Security Deposit (ISD). The Indian Bank is not liable to pay any interest on the ISD. If the successful bidder fails to provide ISD within stipulated times, it will be presumed that agency is not interested in the work and suitable action will be taken as per the terms mentioned in this document.

9. Retention Money

The retention amount at 8% from the Gross value of each R/A or Final bills excluding GST. No interest will be paid on the Security Deposit under any circumstances will be held by the Indian Bank apart from ISD of 2%

10. Release of Retention Money

Retention Money will be released within 30 days after satisfactory completion of defect liability period and defects free as per the contract clauses.

11. No employee of the Indian Bank is allowed to work as a contractor for a period of two years of his retirement from Indian Bank service, without the previous permission of the Indian Bank. The contract is liable to be cancelled if either the contractor or any of his employees is found at any time to be such a person who had not obtained the permission of the Indian Bank as aforesaid before submission of the bid or engagement in the service.
12. The bid shall remain open for acceptance for a period of 90 days from the date of opening of tender.
13. **It will be obligatory on the part of the bidder to sign all the pages of this documents.**
14. The acceptance of bid will rest with the Indian Bank and the Indian Bank reserves to itself the authority to reject any or all of the bids received without the assignment of a reason. The bids which are incomplete in any respect are liable to be rejected. The Indian Bank reserves the right to accept the bid in full or in part and the bidder shall have no claim for revision of rates or other conditions if his quote is accepted in parts.
15. Canvassing in connection with tender is strictly prohibited and the bids submitted by the firms who resort to canvassing will be liable to rejection.
16. **All the entries to be made legibly in ink only.** Rates written in pencil or any other mode shall not be considered for evaluation and will be rejected.
17. An item rate quote containing percentage below / above will be summarily rejected. However, where a bidder voluntarily offers a rebate for payment along with sealed tender, the same may be considered.

18. ABNORMAL RATES

The Contractor is expected to quote after careful analysis of costs based on the specifications mentioned in the Tender. If it is noticed that the rates quoted by the firm is unusually high or unusually low, it will be sufficient cause for rejection of the Tender unless the Employer is convinced about the reasonableness of the rate on scrutiny of the analysis for such rate to be furnished by the firm on demand. Notwithstanding anything there in stand, the rate once accepted by the Employer shall be final and shall not be subject to any claim either on account of un-workability of rates or on any other ground whatsoever.

19. On acceptance of the bid the name of the accredited representative(s) of the Bidder who would be responsible for taking instructions from the Indian Bank shall be communicated to the Indian Bank.
20. Special care should be taken to write the rates in figures as well as in words and the amounts in figures only, in such a way that interpolation is not possible. The total amount should be written both in words and in figures.
21. The Contractor shall comply with and give all notices required under any law, rules, regulations, or bye-law of Parliament, State Legislature or Local Authority relating to works. If needed, the Contractor has to obtain required permission/ approval from the building secretary/ association. The Contractor shall before commencing the execution of work issue a certificate to the Employer that he has obtained all the permissions Registrations and give all the notices as are required to be obtained or given under law particularly blasting permission, Police permission etc.
22. The Contractor shall be required to maintain the site and the building areas in a neat and clean condition at all times to the satisfaction of the Employer. The Contractor shall especially take care to keep areas free from getting water logged, from concrete/mortar dippings, bricks, steel, shuttering materials or any other material / rubbish.
23. Debris and items removed from the building have to be neatly stacked at site and then periodically removed (maximum of one week), carried away by the Contractor and disposed off as per the rules and regulations of the Local Authorities concerned. No debris shall be thrown loose from upper floors. No floor, roof or other part of the building shall be over-loaded with debris or materials as to render it unsafe.
24. Employer reserves the right to insist on selection of material, workmanship, detailing and finishes, which they consider, is appropriate, and suitable for the intended use. The contractor is not eligible to claim extra on this account.

25. Employer will require the contractor to produce, samples of all the materials, accessories/ finishes prior to procurement/ manufacture. The samples of the materials for the work shall be got approved from the Employer. Failure to comply with these instructions can result in rejection of the work/ materials.
26. For painting & Lamination, sample area shall be prepared and the shade got approved. It is also advised to give computer presentation of various colour schemes to the employer before going for sample painting/Lamination.
27. The bidder should note that he should execute his part of work without causing any damage to any component of the building and also without disturbing the occupants. Any damage so caused shall be made good at the cost & risk of the firm.
28. The successful bidders shall include, in the quoted price, all allied civil works such as chasing in wall, drilling holes etc to support the frames, partitions, make the surface good after grouting, scaffolding required if any to load/ unload the materials etc.
29. The successful contractor shall also be responsible for the safety and security of all their materials and also for ensuring fire prevention steps at all times in the working premises including their part of the work. The successful contractor has to place full time representative at site, the representative should have thorough subject knowledge. Bank will not be responsible for any untoward accident caused by negligence of the Contractor
30. The work shall be carried out without disturbing the existing occupants of other offices. Necessary barricading of the area, if required from the rest of the area shall have to be arranged by the successful contractor at no extra cost. The work is to be organized and executed so as to have least disturbance to the occupants of other offices.
31. The contractor should ensure payment of minimum wages + VDA to all labourers / workmen staff employed by him in line with central/ state labour wage act whichever higher.
The Contractor shall at all times indemnify and keep indemnified the Employer against all losses, claims, damages or compensation including under the provisions of the payment of the Wages Act 1936, Minimum Wages Act 1948, Employer's Liability Act 1938, Workman's Compensation Act 1923, the Maternity Benefit Act 1961, the Bombay Shops and Establishments Act 1947, Industrial Disputes Act 1947, and Contract Labour (Regulation and Abolition) Act 1970 and Employees State Insurance Act 1948, Motor Vehicles Act 1988 or any modifications thereof or under any other law relating thereto and rules made thereunder from time to time or as a consequence of any accident or injury to any workman or other person in or about the work whether in the employment of the Employer or Contractor or not, and also against all costs, charges and expenses of any suit, action or proceedings whatsoever out of such accident or injury or combination of any such claims.
32. From commencement to completion of works, the Contractor shall take full responsibility for the care of the work and for taking precautions to prevent loss or damage to the work to the maximum extent possible and shall be liable for any damage or loss that may arise to the works or any part thereof from any cause whatsoever including causes of fire, lightning, explosion, earthquake, storm, hurricane, floods, inundation, subsidence, landslides, rock slides, riots (excluding civil war, rebellion, revolution and insurrection) or any latent defect or damage and shall at his own cost repair and make good the same so that at all times the work shall be in good order and condition and in conformity in every respect with the requirements of the Contract.

For the purpose of this condition this expression "from commencement to completion of works" shall mean the period starting with the date of issue of Work Order or date of handing over of site whichever is later and ending with issue of Virtual Completion Certificate.

Without limiting the obligations and responsibilities under this condition, the Contractor shall insure and keep insured the works from commencement to completion, as aforesaid, for the full contract value including Price Variation Adjustment if any against the risk of loss or damage from any cause whatsoever including the causes enumerated in the foregoing paragraphs. In the event of there being a variation in the nature and extent of the works, the Contractor shall from time to time increase or decrease the value of the insurance correspondingly. All the premia for the insurance shall be borne and paid by the Contractor.

Before commencing the work, the Contractor shall without limiting his obligations and responsibilities under this condition, insure against any loss of life or injury to any personnel in the employment of

Contractor / Sub-Contractor/nominated Sub- Contractor. For this purpose, an insurance shall be taken by the Contractor /Sub- Contractor. Such an insurance shall be taken to include both employees/workmen covered by the Workman's Compensation Act 1923, as well those employees/workmen not covered by the said Act. Separate insurance policies may be taken for employees/ workmen covered by Workman's Compensation Act 1923, and employees / workmen not covered by the said Act. All the premia shall be paid by the Contractor. Policy/Policies taken under this para for the personnel in employment with the Contractor / Sub-Contractor may be in their Employer's names of the Contractor / Sub-Contractor / nominated Sub-Contractors. In the event of any loss or injury to personnel in employment with the Contractor / Sub-Contractor / nominated Sub-Contractors, the Employer and Contractor shall recover directly from the Insurance Company and ensure that payment of the same is made to the affected parties including the Employer. The policy in original shall be deposited with the Employer.

The Contractor shall at all times indemnify and keep indemnified the Employer against all losses and claims for injuries or damage to any person or any property whatsoever which may arise out of or in consequence of the construction and maintenance of the work and against all claims, demands, proceedings, damages, costs, charges and expenses whatsoever in respect of or in relation thereto. The Contractor shall take all precautionary measures to ensure the safety of the workmen employed by it. The contractor shall be fully responsible for the any injury or damage caused to the workmen deployed by him at site for carrying out the work and Bank has nothing to do with such happenings and in no way shall be held responsible for the same.

33. The contractor shall maintain all registers as required by the Regional Labour Commissioner and should furnish the same to the Bank or its representative as and when required.
34. If the work is not started within **5 days** from the date of issue of work order then Employer may terminate the work order without assigning any reason. If during the execution of the work, the progress of work is not considered to be satisfactory and is not consistence to be in contingent with the period of the completion of the work then the Bank may terminate the work order by giving a 3 day notice to the contractor. In such case the contractor shall be liable to pay the employer any extra cost involved for the completion of the said work and will not obstruct any way in completing the work through other agency. After completion of entire work the contractor shall be paid for the actual work executed by him at the quoted rates after deducting any claims, damages.
35. The time allowed for completing the works is **20 days** to be reckoned from **3rd day** from the date of Work Order / date of handing over site whichever is later. Bidder shall submit a programme (time schedule) for executing the entire project and shall furnish the details of their scheme indicating the proposed deployment of their machinery and resources.
36. If the Contractor fails to complete any or all the works by the date/s named in **Clause 35** (Date of Completion) or within any extended time (permitted by Bank) then the Contractor shall pay or allow the Employer the sum to be worked out at **1.0%** of contract value per week to be recovered as Liquidated Damages (and not by way of penalty) for the delay, beyond the said date or extended time, as the case may be, during which the works shall remain unfinished and such damages may be deducted from any moneys due or which may become due to the Contractor. The maximum amount of Liquidated damages shall be **10%** of contract value. The contractor shall be bound to extend validity of Insurance Cover till such period of completion as may be considered necessary at their cost.
37. **Extension of time:** If in the opinion of the Employer/ Consultant the works be delayed (a) by reason of any exceptionally inclement weather or (b) by reason of instructions from the employer in consequence of proceedings taken or threatened by or disputes, with adjoining or neighbouring owners or (c) by the works, or delay of other contractors nominated by the employer and not referred to in the specification or (d) by the reason of authorized extra and additions or (e) by reason or any combination or works men or strikes or lock-out affecting any of the building trade or (f) from other causes which the employer may consider are beyond the control of the contractor, the employer at the completion of the time allowed for the contract shall make fair and reasonable extension of time for completion in respect therefore. In the event of the employer failing to give possession of the site upon the day specified above, the time of completion shall be extended suitably.

In case of such strikes or lockouts as are referred to above, the contractor shall, immediately give the employer, written notice thereof. Nevertheless he shall use his best endeavours to prevent delay, and

shall do all that may be reasonably required, to the satisfaction of the employer for any extension of time for completion hereunder (which shall be final and binding on the contractor) shall be promulgated at the conclusion of such strike or lock-out and the employer shall then, in the event of an extension being, granted, determine, and declare the final completion date. The provision in clause 36 with respect to payments of liquidated damages shall be construed as if the extended date fixed by the employer was substituted for and the damages shall be deducted accordingly.

38. The successful bidder shall be required to execute an Agreement in the proforma attached with this tender document within **5 days** from the date of receipt of the notice of acceptance of tender. In the event of failure on the part of the successful bidder to sign the agreement within the above stipulated period, the earnest money will be forfeited and the acceptance of the tender shall be considered as cancelled.

39. **PAYMENT DETAILS –**

- No advance payment shall be made to the contractor on supply of any material supplied at site for execution. Payment to the contractor shall be made as per actual work done of site.
 - All bills shall be prepared by Contractor in the form prescribed by the Employer / Architects.
 - Only one interim payment /adhoc payment is permitted. Minimum Rs.5,00,000/- or as decided by the Bank. The interim payment /adhoc payment shall be 75% of the works executed at site. The bills in proper forms must be duly accompanied by detailed measurements in support of the quantities of work done and must show deductions for all previous payments, retention money etc. The Architect / Bank's Engineer after detailed scrutiny of the interim bill shall certify within 5 days of the date of receipt of interim bill from the Contractor subject to submission of documentation as required.
 - Bank will deduct the retention money as described in the Clause No 9 and the refund will be made as specified in the Clause No 10.
 - All the interim payments shall be regarded as payment by way of advance against the final payment only and not as payments for work actually done and completed.
 - The final bill will be released on satisfactory completion of the entire work and on completion of all the terms and conditions / obligations spelt out and on proper submission of the bills together with the measurements properly checked by Architect & Bank's Engineer in presence of Contractor. Final Bill settlement is within 20 days from the date of proper submission of bill & measurements.
40. The bidders shall separately specify at the end of the bid the % and value of SGST and CGST as applicable.. Regarding tax part, the tax rate at the time of billing shall rule over and above all documentations. Valid documents shall be produced if asked for at the time before payment. TDS for income tax is as applicable and shall be included in the quoted rates. The comparison for the least bidder shall be made with the basic price of items of work excluding "Goods and Service Tax" part.
41. At any stage i.e. during the execution of work, any kind of change required, whether it is in design or specification, the contractor must inform the concerned Department of the Bank or Interior Consultant and after getting the approval, the same has to be incorporated by the contractor.
42. Single Power point & Water for work will be provide by Bank. The Contractors will make their own arrangement for stay of their workers and they will not be permitted to stay in the Bank Premises.
43. The contractor shall not directly or indirectly sublet the work to other party without written permission of the Bank.
44. The Bank reserves the right to distribute the work for which tender have been called, among more than one parties, if found necessary. No claim in this respect shall be considered and the contractor agrees to cooperate with other agencies appointed by the Bank.
45. Bank shall not be responsible for any loss or damage to the contractor/ labour due to any natural calamity during the course of construction. Contractor is liable to make good all the damages if any, till the work is completed and handed over to the Bank authorities

46. Contractor agencies are advised (before quoting the rates) to inspect the site of the proposed work. They must go through specifications and documents. Any clarification, if required, may be taken from the Bank before submitting the bids.
47. The quantities mentioned in schedule are provisional and likely to increase /decrease to any extent or may be omitted thus altering the aggregate value of the contract. No claim for loss of profit/business shall be entertained on this account.
48. The contractor /vendor failed to carry out the works as per schedule/Quality, the same shall be carryout with different agencies and the actual amount will be deducted from the contractor bills.
49. The contractor agency shall keep particular vigil on his workers to maintain very good workmanship of all items, failing which no payment shall be made and no claim of material / labour used shall be made to him in any case, and the same work shall be executed by him again without charging any extra cost.
50. The Bank reserves the right to accept / reject any bids without assigning any reasons.
51. Any work got executed in poor workmanship as pointed out by the Bank' Official will have to be dismantled and redone by the Contractor on his own cost.
52. Any addition, alteration or correction in the quote shall be signed and stamped properly by the contractor.

DECLARATION :

I / We hereby declare that I / We read and understood the above terms and conditions and that we shall abide by them if the work is awarded to us.

Signature & Seal of the Firm



ARTICLES OF AGREEMENT

THIS AGREEMENT is made on this day of month of between Indian Bank and having its Zonal Office at 2nd Floor, 37, Mumbai Samachar Marg, Fort, Mumbai – 400001 (hereinafter referred to as the “Employer”) which expression shall include its successor, legal heirs and assignees of the one part.

AND M/s. having its office at

(hereinafter referred to as the “Contractor”) which expression shall include its successor, legal heirs and assignees of the second part.

WHEREAS the Employer has caused drawings and bid documents for ‘Interior Furnishing Work in Vashi Sector-17 Branch’

AND whereas the Employer has called for Tender vide ref. no. dated.....

AND whereas the contractor has submitted the Tender ref. no. dated to the Employer on

AND whereas the Employer has issued the work order ref dated..... to the contractor to do the work.

AND whereas the Contractor has agreed to execute the work as per drawings, specifications, conditions of contract and Work Order.

AND whereas the Employer has accepted the Contractor’s bid as aforesaid and whereas the bid submitted by the contractor has been accepted for such sum as may be ascertained to be payable in terms of the Bill of Quantities and which sum is estimated to be Rs. (Rupees) hereinafter referred to as the said “Contract Agreement”.

NOW THIS AGREEMENT WITNESSETH AS FOLLOWS:-

- 1) In consideration of the said Contract Sum to be paid at the times and in the manner set forth in the said Conditions the Contractor shall carry out and complete the Works in terms and conditions herein contained and according to the general conditions of the contract, notice inviting tender, special conditions of contract, general scope of work, technical specifications, schedule of rates and instructions to be given by and the supervision of and to the entire satisfaction of the Employer.
- 2) **Contract Price, Taxes and Payment Terms :**

Total contract price is Rs. + GST which is inclusive of cost of materials, equipment, installation charges and tools and tackles required for execution of the job. Above price is inclusive of all taxes & duties except GST in respect of this contract. No claim in this respect will be entertained. Income tax on payments will be deducted and deposited by Employer in accordance with the sales tax law of the state and the provisions of tax deductions at source under income tax act 1961.



3) **Completion Period:**

Time is the essence of the Contract. The work is to be completed in all respects within **20 days** reckoned from 3rd day from the date of issue of the Work Order or handing over of site whichever is later. If the Contractor fails to complete the job within the agreed time period the Contractor will have to bear liquidated damages as per the relevant clause mentioned in the Tender Documents.

4) **Earnest Money:**

The Contractor has deposited an amount of **Rs.24,900/- (Rupees Twenty Four Thousand Nine Hundred only)** as earnest money.

5) **Inspection of Site:**

The Contractor has inspected the site before submitting his bid and has satisfied himself as to the nature of the work to be executed on the site. Any difficulties which the Contractor may come across in the course of the work shall in no way relieve the contractor to claim or receive extra payment unless the Employer is of the opinion that such difficulties could not have been foreseen and the Employer consents in writing.

6) **Supply of Material and Labour:**

The Contractor shall arrange all labour, materials, equipments, tools, tackles and everything necessary for the completion of the work. The Contractor will assume all responsibility for the safety, protection and accounting of all material and equipment and the work during construction. All materials used by the Contractor shall be of the best quality conforming to the required specification mentioned in the bid document and will be subject to the approval of the Employer. All such materials not approved by the Employer shall be removed at once by the Contractor at his own expense. The Contractor shall also at his own expense arrange for carrying out any test of materials which the Employer may from time to time require or if so desired by the employer.

7) **Defective Work / Materials:**

If any part of the work done by the Contractor is found defective in workmanship or if bad or inferior materials have been used the Contractor shall at his own risk and cost demolish all such defective work and rebuild the same and / or replace the bad or inferior materials used within a time frame mentioned to the satisfaction of the Employer. The decision of the Employer in this regard shall be final and binding on the Contractor. In case of default of the contractor to remove the defective work and rebuild the same or replace bad or inferior materials as directed by the Employer, the Employer shall be entitled to employ anyone else to carry out the same at risk and cost of the Contractor and recover all expenses incurred in this regard from the contractor.

8) **Inspection of Work:**

During progress of the work the Employer shall be entitled at all times to have access to and inspect the work.

9) **Supervision:**

The Contractor shall provide one or more competent and technical qualified engineers duly and fully authorized to act on his behalf in all matters relating to the works to be carried out under or any other



matter concerning this agreement and who shall at all times be present at the works while any work is in progress as per directions, explanations & instructions of Employer.

10) Compliance with Statutory Regulations & Work Rules:

The Contractor shall be responsible for complying with the applicable laws / bye laws / Regulations in force from time to time and shall have to bear all statutory liabilities to the workers / personnel engaged for the job. Nothing will be paid extra in this regard. If any amount is paid by the Employer with this regard the same amount shall be deducted from the Contractor's dues. The Contractor shall have to arrange insurance cover for the workers / personnel engaged by him for the job.

11) Determination of Contract:

In the event of Contractor failing to keep / adhere to agreed schedule of work, or in the event of the Contractor failing to comply with the provisions of this contract by default and / or negligence and / or suspension of work or in the event of Contractor failing to complete the work within the stipulated period, the Employer may terminate this Agreement forthwith and employ, at the Contractor's risk and cost, another contractor or sufficient number of workmen to complete the work.

12) Force Majeure:

This clause will be operative only if the work is delayed by

- a. Acts of God
- b. Earthquake or floods or similar natural calamities.
- c. Serious loss or damage by fire or lightning.

In case any Force Majeure condition herein mentioned occurs and continues for a period exceeding 15 days the parties hereto undertake to sit together and devise ways for expeditious and proper performance of the obligations of the parties under this order.

13) Arbitration:

“ In the event of any dispute or difference relating to interpretation and application of provisions of the contract and all disputes/ claims whatsoever which shall either during the continuance of the contract or afterwards either between the parties to the contract or the respective representatives touching the construction/ application of any provision/ clause mentioned in the contract or any account or liability between the parties to the contract or as to any act or deed or omission of any party to the contract, in any way relating to these presents, shall be first at the discretion of the Bank attempted to be resolved in good faith by mutual discussion within 30 days of the dispute or question being raised failing which the same shall be settled by arbitration in accordance with provisions of Indian arbitration and Conciliation act 1996.

The Parties concerned shall designate an arbitrator on mutual consent/ consensus. The venue of the arbitration shall be exclusively at Mumbai and any award passed by arbitrator shall be final, conclusive and binding upon the parties and shall be deemed to have been made between parties themselves. The parties to the dispute shall share equally the cost of arbitration as intimated by the arbitrator”.

IN WITNESS whereof the said contracting parties have set their hands and seals on the day and year first hereinabove witness.

Witness Address

Employer

Witness Address

Contractor

List of Materials of Approved Brand And/ Or Manufacture

SL NO	Description	Make of materials
1	Wood	First class steam beach wood or as specified
2	Polish	Melamine
3	Soft Board	Celotex
4	Block Board (BWR CONFORMING TO IS 303)	Century / Greenply / Archid / Sylvan
5	Plywood (BWR CONFORMING TO IS 303)	Century / Greenply / Archid / Sylvan
6	Laminates	Century / Aica Sunmica / GreenPly / Formica / Merino (Shade will be approved by Bank)
7	Glass	Modi / Saint Gobain
8	Gypsum Board / 2x2 Tiles	Gypsum Board – Gyproc / India Gypsum 2 x 2 Tiles – GYPROC / KNAUF (Armstrong)
9	Aluminum Sections	Hindalco / Jindal / Nelco or approved equivalent
10	Locks / Handles	Godrej / Harrison / Hettich
11	Magnet Catcher	Supreme / Excel
12	Drawer Sliding Fittings	Earl Bihari (EBCO)/Godrej/ Hettich or equivalent approved
13	Floor Spring/Door Closer	Hemco / Hardwin/ Godrej / Ozone or equivalent approved
14	Paint / Enamel	Berger / Nerolac / Asian Paints / Indigo / Dulux
15	Cement / Wood Primer	Berger / Nerolac / Asian Paints / Dulux / Indigo

Note –

1. Materials mentioned in the specification shall be used for the work. If specified material is not available prior approval of the Employer shall be taken to use other brands.
2. Preference of makes, supply of items should be consulted with client/consultant before effecting of supply.

NAME AND ADDRESS OF THE CONTRACTOR:

SIGN & SEAL OF THE CONTRACTOR:

Date:

BILL OF QUANTITIES

1. No offsite prefabrication shall be allowed in any case. All fabrication shall be done at the site after getting the materials inspected by the architect
2. No payment shall be made for any in completed or unsatisfactory work
3. List of material to be strictly as per the booklet.
4. Cable Managers to be provided in the tables and Counters wherever required.
5. All Locks in the drawers and doors etc. should be of Godrej
6. All keyboard Trays and Drawers to be on Channel Sliding Mechanism.
7. Etching to be provide as per Banks Design and Specification.
8. The contractor to follow the banks colour Coding. Any other specified colour to be superceded by the Banks Colour code.
- 9. All plywood and blockboard to be BWR Grade Only and the plywood / blockboard must be Water Resistant complying to IS 303 and with minimum 7 years warranty. Kindly quote the rate for partition and paneling considering the above item. Use of any other grade of plywood / blockboard at the site will be considered as the breach of contract and the contract will be immediately terminated.**

S.NO.	DESCRIPTION OF ITEM	QUANTITY	UNIT	RATE PER QUANTITY (Exclusive of GST)	TOTAL AMOUNT (Exclusive of GST)
				Rs.	Rs.
I	PARTITION WORKS				
1	PARTLY GLAZED FULL HEIGHT PARTITION				

	Providing and Erecting in position partly glazed partitions (including door) to be made out of 50 mm X 38 mm X 1.2mm thick Aluminum Tubular section frame work 600mm c/c bothways (Vertical & Horizontal) fixed with 50mm X 38mm X 2.0 mm thick Aluminum Angle Cleats covered with 6 mm thick BWR Ply from both the side. Item to include 6 mm thick glass with etching and frosting as per design above 3'0"/4'0" to be fixed with beading. Item to include 2" X 2", 16 gauge Aluminum Framing member for door frame & for Skirting. The aluminum members of partition shall rigidly fixed to the existing Ceiling /Floors /Beams & Side Walls as directed. Having flush door 35mm thk. with glass as per design. The rate should be inclusive of all hard wares like 3 Nos of brass hinges, 1'-0" Ht. H or U shaped S.S. matt steel handles, deadlock, heavy duty door closers/ floor spring of app. company etc. complete as per the designs. All exposed surfaces of the partition shall have 1.0mm thick laminate of approved make/color with the provision of grooves if required as per design etc. complete. The necessary openings in the partitions shall be provided for Electrical Conduits, Electrical Switches, A.C. Opening, Fire Detectors, Electric Fixtures, etc. complete as per site requirements/ instructions of the Architect / Engineer. Note: - Height of the partitions up to sofit of false ceiling shall be considered for payment. Rate of Unfinished partition above false ceiling shall not be paid separately should be inclusive in the tender rate.	100.00	Sq.ft.		
--	--	--------	--------	--	--

2	PARTLY GLAZED PARTITION FOR CASH CABINS				
	Providing and Erecting in position partly glazed cash cabin partitions (including door) to be made out of 50 mm X 38 mm X 1.2mm thick Aluminum Tubular section frame work 600mm c/c bothways (Vertical & Horizontal) fixed with 50mm X 38mm X 2.0 mm thick Aluminum Angle Cleats covered with 6 mm thick BWR Ply from both the side. Item to include 6 mm thick glass with etching and frosting as per design above 3'0"/4'0" to be fixed with beading. Item to include 2" X 2" 16 gauge Aluminum Framing member for door frame & for skirting. The aluminum members of partition shall rigidly fixed to Floors & Side Walls as directed. Having flush door 35mm thk. with glass as per design. The rate should be inclusive of all hard wares like 3 Nos of brass hinges, 1'-0" Ht. H or U shaped S.S. matt steel handles, mortice lock/ night latch, heavy duty door closers/ floor spring of app. company etc. complete as per the designs. All exposed surfaces of the partition shall have 1.0mm thick laminate of approved make/color with the provision of grooves if required as per design etc. complete. The necessary openings in the partitions shall be provided for Electrical Conduits, Electrical Switches, A.C. Opening, Fire Detectors, Electric Fixtures, passbook printers, registers etc. complete as per site requirements/ instructions of the Architect.	50.00	Sq.ft.		
3	SOLID FULL HEIGHT PARTITION				

	Providing and Erecting in position solid partitions (including door) to be made out of 50 mm X 38 mm X 1.2mm thick Aluminum Tubular section frame work 600mm c/c bothways (Vertical & Horizontal) fixed with 50mm X 38mm X 2.0 mm thick Aluminum Angle Cleats covered with 6 mm thick BWR Ply from both the side. Item to include 2" X 2" 16 gauge Aluminum Framing member for door frame & for skirting. The aluminium members of partition shall rigidly fixed to the existing Ceiling / Floors / Beams & Side Walls as directed. Having flush door 35mm thk. with glass as per design. The rate should be inclusive of all hard wares like 3 Nos of brass hinges, 1'-0" Ht. H or U shaped S.S. matt steel handles, deadlocks, heavy duty, door closers/ floor spring of app. company etc. complete as per the designs. All exposed surfaces of the partition shall have 1.0mm thick laminate of approved make/color with the provision of grooves if required as per design etc. complete. The necessary openings in the partitions shall be provided for Electrical Conduits, Electrical Switches, A.C. Opening, Fire Detectors, Electric Fixtures, etc. complete as per site requirements/ instructions of the Architect / Engineer. Note: - Height of the partitions upto soffit of false ceiling shall be considered for payment. Rate of Unfinished partition above false ceiling shall not be paid separately should be inclusive in the tender rate.	150.00	Sq.ft.		
4	PARTLY GLAZED LOW HEIGHT PARTITION.				
	Providing and Erecting in position partly glazed low height partitions (including door) to be made out of 50 mm X 38 mm X 1.2mm thick Aluminum Tubular section frame work 600mm c/c bothways (Vertical & Horizontal) fixed with 50mm X 38mm X 2.0 mm thick Aluminum Angle Cleats covered with 6 mm thick BWR Ply from both the side. Item to include 12 mm thick glass with etching and frosting as per design above 3'0" to be fixed with beading. Item to include 2" X 2", 16 gauge Aluminum Framing member for Skirting. The aluminum members of partition shall rigidly fixed to the Floors, Side Walls, partitions etc. as directed. All exposed surfaces of the partition shall have 1.0mm thick laminate of approved make/color with the provision of grooves if required as per design etc. complete. The necessary openings in the partitions shall be provided for Electrical Conduits, Electrical Switches, A.C. Opening, Fire Detectors, Electric Fixtures, etc. complete as per site requirements/ instructions of the Architect / Engineer.	50.00	Sq.ft.		

5	FULL HEIGHT 12 MM THK TOUGHENED GLASS PARTITION				
	Providing and Erecting in position 12 mm thk. toughend glass partition (excluding door) with necessary profiles as per design upto 7'0" height and solid partitions above 7'0" height to be made out of 50 mm X 38 mm X 1.2mm thick Aluminum Tubular section frame work 600mm c/c bothways (Vertical & Horizontal) fixed with 50mm X 38mm X 2.0 mm thick Aluminum Angle Cleats covered with 6 mm thick BWR Ply from both the side. The aluminum members of partition shall rigidly fixed to the existing Ceiling /Beams & Side Walls as directed. The Profile Manufacturer to supply all the necessary clips, seals and fixing accessories for the system. All exposed surfaces of the partition shall have 1.0mm thick laminate of approved make/color with the provision of grooves if required as per design etc. complete. The necessary openings in the partitions shall be provided for all services etc. complete as per site requirements. Note: - Height of the partitions upto soffit of false ceiling shall be considered for payment. Rate of Unfinished partition above false ceiling shall not be paid seperately should be inclusive in the tender rate.	300.00	Sq.ft.		
6	WICKET GATE				
	Providing & fixing wicket gate to counter / wall out of 1-1/2" x 1-1/2" C.P.T.W. frame with 6mm thick BWR plywood on both sides finished with 1.0mm thick laminate of approved make and shade, with heavy duty brass hinges, bolt, handle etc. complete as per design. (3 NOS)	1.00	Nos.		
	SUB-TOTAL (I)				
II	COUNTERS & TABLES				
1	FRONT OFFICE COUNTER				
	Providing and fixing in position Front Office Counter 2'-6" wide at 2'6" ht; 12 mm thk. glass with film for customer top 6" wide at 4'0" ht. and vertical 12mm thk. Glass with film 18" high above writing top as per drawing comprising of the following complete in all respects:-	22.00	R.ft.		
	i) Working top at 2'6" level made with 18mm thick BWR plywood finished with 1.0mm thick laminate of approved make and shade. Outside edge of the working top shall be provided with 2" X 1" Teak wood moulding finished with 1.0mm thick laminate. Inside edge will be provided with 1/2" X 3/4" T.W. beading patti with 1.0mm thick laminate.				

	ii) Customer top at 4'0" level 6" wide made of 12 mm thick glass with machine polish on all sides, supported by 12 mm thk. Glass 1'6" high.				
	iii) Vertical facia (Apron) made with 18mm thick BWR plywood boxing finished with 1.0mm thick laminate of approved make and shade with 1mm thick groove at the joint of laminates of two different shades.				
	iv) Vertical drop (horizontal band) shall be provided on the facia below the working top made with 18mm thick plywood finished with 1.0mm thick laminate of approved make and shade with provision for concealed light 1mm thick groove shall be provided at the joint of two different shades of laminate.				
	v) Vertical supports made with 18mm thick BWR plywood finished with 0.8 mm thk Laminate.				
	vi) Telescopic CPU stand / ready made Keyboard tray / wire manager shall be provided of approved model and make				
	vii) Footrest made with T.W. member of size 4" X 1 ½" finished with 0.8 mm thk Laminate.				
	viii) Drawer box unit comprising of three drawers on powder coated channels, one of size 1'4" W x 6" H x 2'0" D and two big drawers as per drawing shall be provided with multipurpose Godrej locks in each drawer. Facia of drawer unit shall be finished with 1.0mm thick laminate of approved make and shade and all other sides shall be finished with 0.8 mm thk Laminate. The drawers will be provided with handles (Stainless steel finish) and channels as per approval of the project consultant / Bank.				
	ix) Boxing as per drawing made with 12mm thick BWR plywood finished with 0.8 mm thk Laminate shall be provided below the table top for electrical conduiting and at the bottom for the LAN cabling / Telephone wire conduiting.				
	The item to include all necessary hardware and fittings in Stainless steel finish, lipping to all edges and making provision only for electrical fitting behind the front. Vertical drop as shown in the drawing. Necessary beadings with polish for fixing the glass are to be provided.				

2	CASH COUNTER				
	Providing and fixing in position Cash Counter 2'6" wide 2'6" high with 18" high Vertical 12 mm thk. glass with film, horizontal customer top 12mm thk. glass 16" wide at 4'0" ht; 3'0" high vertical 12mm thk. Glass above 4'0" as per drawing comprising of the following complete in all respects:-	5.00	R.ft.		
	i) Working top at 2'6" level made with 18mm thick BWR plywood finished with 1.0mm thick laminate of approved make and shade. Outside edge of the working top shall be provided with 2" X 1" Teak wood moulding finished with 1.0mm thick laminate. Inside edge will be provided with ½" X ¾" T.W. beading patti with 1.0mm thick laminate.				
	ii) Customer top at 4'0" level 16" wide made of 12 mm thick glass with machine polish on all sides, supported by 12 mm thk. Glass 1'6" high.				
	iii) Vertical facia (Apron) made with 18mm thick BWR plywood boxing finished with 1.0mm thick laminate of approved make and shade with 1mm thick groove at the joint of laminates of two different shades.				
	iv) Vertical drop (horizontal band) shall be provided on the facia below the working top made with 18mm thick BWR plywood finished with 1.0mm thick laminate of approved make and shade with provision for concealed light 1mm thick groove shall be provided at the joint of two different shades of laminate.				
	v) Vertical supports made with 18mm thick BWR plywood finished with 0.8 mm thk Laminate.				
	vi) Telescopic CPU stand / ready made Keyboard tray / wire manager shall be provided of approved model and make				
	vii) Footrest made with T.W. member of size 4" X 1 ½" finished with 0.8 mm thk Laminate.				
	viii) Drawer box unit comprising of three drawers on powder coated channels, one of size 1'4" W x 6" H x2'0" D and two big drawers as per drawing shall be provided with multipurpose Godrej locks in each drawer. Facia of drawer unit shall be finished with 1.0mm thick laminate of approved make and shade and all other sides shall be finished with 0.8 mm thk Laminate. The drawers will be provided with handles (Stainless steel finish) and channels as per approval of the project consultant / Bank.				

	ix) Boxing as per drawing made with 12mm thick BWR plywood finished with 0.8 mm thk Laminate shall be provided below the table top for electrical conduiting and at the bottom for the LAN cabling / Telephone wire conduiting.				
	The item to include all necessary hardware and fittings in Stainless steel finish, lipping to all edges and making provision only for electrical fitting behind the front. Vertical drop as shown in the drawing. Necessary beadings with polish for fixing the glass are to be provided.				
3	RUNNING TABLE				
	Providing & fixing running working Table 2'0" wide as per layout with 25mm thick plywood for top and 18mm thick BWR plywood for all other horizontal and vertical members as per design including keyboard drawer on channel, CPU Stand, footrest and storage box with 5" high drawer on channel and shutter below with locking arrangement. All exposed plywood of table shall be finished with 1.0mm thick laminate of approved make and shades as shown in drawings and all other sides shall be finished with 0.8 mm thk Laminate as per Architect's instructions.	5.00	R.ft.		
4	MANAGER'S TABLE WITH SIDE TABLE				
	Providing and fixing in position Circular Manager's Table of size 6'-0" X 3'-0" as per drawing including side storage (Credenza) by using 25mm thick BWR plywood for top and 18mm thick BWR plywood for top and 18mm thick plywood for all other horizontal and vertical members. Telescopic CPU Stand / ready made keyboard tray shall be provided of approved model and make. Footrest made with T.W. member of size 4" X 1 ½" finished with Laminate & all exposed plywood of table shall be finished with 1.0mm thick laminate of approved make and shades as shown in the drawing and all other sides shall be finished with 0.8 mm thk Laminate.	1.00	Nos.		
	Drawer units as per drawing shall be provided with multipurpose Godrej locks in each drawer. Facia of drawer unit shall be finished with 1.0mm thick laminate of approved make and shade and all other sides shall be finished with 0.8 mm thk Laminate. The drawers will be provided with handles (Stainless steel finish) and channels as per approval of the Project Consultant / Bank.				

	The side Storage (Credenza) shall be provided with handles (Stainless Steel finish) and channels as per approval of the Project consultant / Bank. All exposed plywood surfaces to be finished with 1.0mm thick laminate of approved make and shade of approved make and shade, and all exposed edges of table top and BWR ply verticals to have 1" and ¼" T.W. lipping. All exposed T.W. sections to be Laminated and internal surfaces to have 0.8 mm thk Laminate as directed. Item to include plywood boxing, all necessary hardware and fittings in Stainless Steel finish, lipping to all edges etc. complete in all respects.				
5	OFFICER TABLE WITH SIDE TABLE				
	Providing and fixing in position Circular Officer Table of size 4'-0" X 2'-3" as per drawing including side storage (Credenza) by using 25mm thick plywood for top and 18mm thick BWR plywood for top and 18mm thick plywood for all other horizontal and vertical members. Telescopic CPU Stand / ready made keyboard tray shall be provided of approved model and make. Footrest made with T.W. member of size 4" X 1 ½" finished with French polish & all exposed plywood of table shall be finished with 1.0mm thick laminate of approved make and shades as shown in the drawing and all other sides shall be finished with 0.8 mm thk Laminate.	1.00	Nos.		
	Drawer units as per drawing shall be provided with multipurpose Godrej locks in each drawer. Facia of drawer unit shall be finished with 1.0mm thick laminate of approved make and shade and all other sides shall be finished with 0.8 mm thk Laminate. The drawers will be provided with handles (Stainless steel finish) and channels as per approval of the Project Consultant / Bank.				
	The side Storage (Credenza) shall be provided with handles (Stainless Steel finish) and channels as per approval of the Project consultant / Bank. All exposed plywood surfaces to be finished with 1.0mm thick laminate of approved make and shade of approved make and shade, and all exposed edges of table top and ply verticals to have 1" and ¼" T.W. lipping. All exposed T.W. sections to be Laminated and internal surfaces to have 0.8 mm thk Laminate as directed. Item to include plywood boxing, all necessary hardware and fittings in Stainless Steel finish, lipping to all edges etc. complete in all respects.				
	SUB-TOTAL (II)				

III	STORAGE CABINETS				
1	FULL HEIGHT STORAGE				
	Providing and fixing in position full height storage of different size and 450mm deep made out of 19mm thick BWR ply frame work for sides, bottom, shelves, top, shutters, verticals & border for shutters fixed vertically, horizontally as shown in drg; 6mm thick BWR ply for backside of storage along with teak wood edge beading. The bottom of the storages shall be at 75mm from FFL. The shutters shall be fixed with S type L hinges of approved make so as to get an equal 8 mm groove between all the shutters at the opening and hinged end of every shutter as per the detailed darwing. All exposed surfaces shall have approved make/color 1.00 mm thick laminate including edges, grooves and 0.8mm thick white colour laminate to all internal surfaces along with necessary hardware i.e. Stainless Steel Hinges with Stainless Steel Bearing Stainless, Steel Brush Finished Handles, 150mm Stainless Steel Tower bolts at top and Bottom Magnetic Ball Catches, stainless steel pin for adjustable shelves, locks of approved make, The shutter shall be fixed with SS chain from inside so as to open the shutter less than 90 degree and to avoid the breaking of Solid Core Laminate at the hinged end etc. complete in all respects as directed by the Architect /Bank.	200.00	Sq.ft.		
2	LOW HEIGHT STORAGE				
	Providing and fixing in position low height storage of different size and 450mm deep made out of 19mm thick BWR ply frame work for sides, bottom, shelves, top, shutters, verticals & border for shutters fixed vertically, horizontally as shown in drg; 6mm thick BWR ply for backside of storage along with teak wood edge beading. The bottom of the storages shall be at 75mm from FFL. The shutters shall be fixed with S type L hinges of approved make so as to get an equal 8 mm groove between all the shutters at the opening and hinged end of every shutter as per the detailed darwing. All exposed surfaces shall have approved make/color 1.00 mm thick laminate including edges, grooves and 0.8mm thick white colour laminate to all internal surfaces along with necessary hardware i.e. Stainless Steel Hinges with Stainless Steel Bearing Stainless, Steel Brush Finished Handles, 150mm Stainless Steel Tower bolts at top and Bottom Magnetic Ball Catches, stainless steel pin for adjustable shelves, locks of approved make, The shutter shall be fixed with SS chain from inside so as to open the shutter less than 90 degree and to avoid the breaking of Solid Core Laminate at the hinged end etc. complete in all respects as directed by the Architect /Bank.	25.00	Sq.ft.		

3	STORAGE ABOVE / WALL HUNG STORAGE (375 mm Deep)				
	Providing and fixing in position wall hung storage of different size and 375mm deep made out of 19mm thick BWR ply frame work for sides, bottom, shelves, top, shutters, verticals & border for shutters fixed vertically, horizontally as shown in drg; 6mm thick BWR ply for backside of storage along with teak wood edge beading. The shutters shall be fixed with S type L hinges of approved make so as to get an equal 8 mm groove between all the shutters at the opening and hinged end of every shutter as per the detailed darwing. All exposed surfaces shall have approved make/color 1.00 mm thick laminate including edges, grooves and 0.8mm thick white colour laminate to all internal surfaces along with necessary hardware i.e. Stainless Steel Hinges with Stainless Steel Bearing Stainless, Steel Brush Finished Handles, 150mm Stainless Steel Tower bolts at top and Bottom Magnetic Ball Catches, stainless steel pin for adjustable shelves, locks of approved make, The shutter shall be fixed with SS chain from inside so as to open the shutter less than 90 degree and to avoid the breaking of Solid Core Laminate at the hinged end etc. complete in all respects as directed by the Architect /Bank.	50.00	Sq.ft.		
4	SHUTTER FOR ELECTRICAL PANEL				
	Providing and Fixing shutters for electrical panel made made out of 19mm thick fire resistant ply with edge beading. All exposes surfaces shall have approved make/color 1.00 mm thick laminate and 0.8mm thk. approved color laminate from inside along with 150mm wide Aluminum powder coating A.C.grill at top and bottom for exhaust including hardware i.e. S. S. Hinges with Stainless Steel Brush Finish Handles, 150mm Stainless Steel Tower Bolts at top and bottom, Magnetic Ball Catches,Locks, etc. complete as per site requirements, detail drawings and instructions of the Architect.	30.00	Sq.ft.		
	SUB-TOTAL (III)				
IV	PANELING WORKS				
1	PANELING TO COLUMNS & WALLS				

	Providing and Fixing laminate finish paneling for walls, columns etc. made out of 50mm X 25mm X1.2 mm thick Aluminum Tubular frame work at every 1'-6" c/c (Vertical /Horizontal) both ways, covered with 9 mm thk. BWR ply. upto ceiling height as per site requirement. All the exposed surfaces of the paneling shall be finish with approved make/color 1.00mm thk. solid core laminate upto ceiling height along with groove at junction of laminate etc. complete as per site requirements, detail drawing and the instructions of the Architect/ Engineer.	1350.00	Sq.ft.		
2	8 mm thk. Calcium Silicate Panelling				
	Do as above item, but Panelling shall have 8 mm thk. Calcium Silicate board finish with plastic emulsion paint etc. complete as per site requirement and instruction of Architect / Engineer.	100.00	Sq.ft.		
3	LAMINATE FIXING				
	Providing and fixing 4mm THK BWR plywood on partition including doors, storage including shutters & sides finished with 1mm thick laminates of approved shade and colour. All exposed T.W. surfaces to be finished in polish of matching laminate colour as directed including all necessary Stainless Steel finish fittings / hardware, handles, locks and wood preservative paint etc. as per list of approved material and as approved by the Project consultant / bank complete in all respects.	200.00	Sq.ft.		
4	ACP PANELLING				
	Providing and fixing in position Nanomite Aluminium composite panel boxing with PVDF coating and LDPE copre laminated Euroband / Altobond / Alukbond Exterior Grade 4 mm thick with composite of (0.5mm – 3mm – 0.5mm) including fabrication for the same with aluminium sections, required hardware, silicon sealent (Dow Corning 789) masking tape, necessary scaffolding etc. as detailed in drwing no. (11) complete in all respects.	150.00	Sq.ft.		
	SUB -TOTAL (IV)				
V	DOORS				
1	ENTRANCE DOOR				

	Providing and Fixing Glass doors with 12mm thk. toughened glass in single piece with computerised diamond cut and diamond edge polish including making required cutouts, holes for locks, handles, pivot, patch fittings, corner fittings, hinges etc. The rate is inclusive of supply and fixing of Dorma or equivalent make floor spring, Pivot (Top & Bottom) patch fitting with cover plate, handles, Locks, Signages with necessary hardware etc. complete as per site requirement and instructions of the Architect/ Engineer.	75.00	Sq.ft.		
	SUB-TOTAL (V)				
VI	FALSE CEILING WORK				
1	FALSE CEILING (GYPSUM BOARDS) WITH COVE				
	P/Fixing Gypsum Board false ceiling of Gypsum India or equivalent make. METALLIC GRID (conforming to IS:2095:1982): - The metallic grid shall consists of GI Perimeter channels of size 27mm X 0.5mm thick having one flange of 20mm & another flange of 30mm, GI Intermediate channel of size 45mm X 0.9mm thick with two flange of 15mm each at 1200mm center to center, GI hanger of size 25mm X 10mm X 0.5mm thick at 1200mm center to center distance along with GI Cleat & Steel Expansion Fasteners. The Ceiling section of 0.5mm thickness having curled wedge of 51.5mm and two flanges of 26mm each with lips of 10.5mm at 450mm c/c. along with connecting clips of 12.5mm drive fixed with sheet metal screws at 230mm c/c. METAL GRID INSTALLATION: - Perimeter channel fixed to all side of walls, partitions, beams, columns, whichever applicable fixed with sheet metal screws with rawalplugs at 225mm center to center & intermediate channels at 1200mm center to center including GI steel hangers fixed to the slab, beams soffit, whichever with GI cleats & steel expansion fastners. The ceiling section placed in a direction perpendicular to the intermediate channel at 450mm c/c. fixed to the intermediate channel with the help of connecting clips & 12.5mm dry wall Sheet Metal Screws at 230mm c/c. distance. COVERING: - Fixed 12.5mm thick gypsum board to the metal frames in required shape in taper / square edges of the gypsum board shall be finish with filling the joints with fibre tape finish the surfaces in one level & line finish with three coats of approved make / shade Plastic Emulsion paint including making grooves, cutouts for Light Fittings, AC Grills, AC Diffusers, Smoke Detectors, Sprinklers System, Security System etc. as per the other vendors requirements along with additional frame for Light Fittings & AC Grills, scaffolding etc. complete as	1000.00	Sq.ft.		

	per instructions of Architect. OR do as per Manufacturer's Specification. Cutouts will not be deducted while measuring the ceiling area.				
2	FALSE CEILING (GYPSUM BOARDS) 6" high Patta				
	Providing and fixing in position 6" patta for false ceiling in Gypboard 12mm thick for horizontals and verticals fixed over G.I. framework as specified by India Gypsum Co. Ltd. including finishing with White Plastic Emulsion Paint etc. complete in all respects.	250.00	R.ft.		
3	FALSE CEILING (GRID)WITH BLACK SILHOUTE GRID				

	Providing and fixing in position false ceiling in Armstrong 600 X 600 mm X 15/16 mm Dune Supreme RH 99 Prima tile with Tegular Edge framework as specified by Armstrong Co. with suspenders wherever required. Making necessary framework for A.C. ducting, if any, and necessary cutouts for diffusers and light fittings, taping and finishing to proper line and level, including making grooves and trap doors for A.C. unit in 18mm thick M.R. Grade Plywood with Stainless Steel hinges and locks with moulding 1" X 1" for edges including finishing with White Plastic Emulsion Paint etc. complete in all respect. (Note :- Only the plan area will be measured for payment. No extra payment will be made for cutouts, grooves, mouldings etc.)	305.00	Sq.ft.		
	SUB-TOTAL (VI)				
VII	MISCELLANEOUS WORKS				
1	PLASIC PAINT				
	Providing and applying Plastic paint of Asian Paints / ICI Dulux/Berger in minimum 2 coats including scrapping, opening of existing cracks, filling up of "V" cracks with epoxy expandable putty to required depth, making good weak plastered / unplastered surfaces with cement plaster wherever required. Item to include Plaster of Paris, primer, palti and making good existing surface to receive new paint including cleaning on completion of painting work etc. complete in all respects.	3300.00	Sq.ft.		
2	TEXTURE PAINT				
	Preparing the surfaces of walls by scraping loose lime/paint, applying one coat of cement primer, leveling the surfaces with putty and providing and applying texture paint of lokos make & shade/s including necessary scaffolding etc. complete.	200.00	Sq.ft.		
3	SYNTHETIC ENAMEL PAINT				
	Providing & supplying all materials and application of one coat of primer paint two coats synthetic enamel paint of approved colour and manufacture including preparation of surface, scaffolding etc., complete including all materials as per specifications and directions of Architects.	1000.00	Sq.ft.		


4	KEY HANGING CUPBOARD				
	Providing & making key hanging cupboard with 3/4" thk. BWR ply and 6mm thk ply for back as per detailed drawing including brass hinges, handles and locking arrangement, all exposed surfaces to be finished with 1.00mm thk. solid core laminate of approved make and shade & 0.8 mm thk Laminate from inside.	1.00	Nos.		
5	GLASS ON TABLE TOP				
	Providing and placing 12mm thk glass on Manager Table including hole for wire manager, machine cut edge polish etc. complete.	18.00	Sq.ft.		
6	CHEQUE DROP BOX/ SUGGESTION BOX				
	Providing & making Cheque drop box/ Suggestion Box with acrylic as per detailed drawing including hinges, handles and locking arrangement.	2.00	Nos.		
7	MIRROR				
	Supply & installation of 6mm thk. Clear glass Mirror of approved make on toilet wall including 12mm thk. BWR Plywood backing with necessary framework and moulding. The exposed framework to be polished etc. complete	20.00	Sq.ft.		
8	WRITING DESK				
	Providing & fixing writing desk made out of 16 mm thick BWR ply finished with 1.0mm thick laminate of approved make and shade from all exposed sides as per detail drawing including 12 mm thick glass with polished edge fixed on writing top with box. Size 3'0"x 1'6	1.00	Nos.		
9	SOFT BOARD				
	Providing and fixing 1/2" thick soft board to be fixed on 6mm thick BWR ply & to be covered with woolen felt of approved colour including side lipping patti etc. complete.	60.00	Sq.ft.		
	SUB-TOTAL (VII)				
A	TOTAL AMOUNT (SUB TOTAL - I+II+III+IV+V+VI+VII)				
B	GST AMOUNT (.....%)				
C	GRAND TOTAL (C=A+B)				

GROSS AMOUNT IN WORDS :


Rupees.....only

Place:
Date:

Signature & Seal of the Bidder

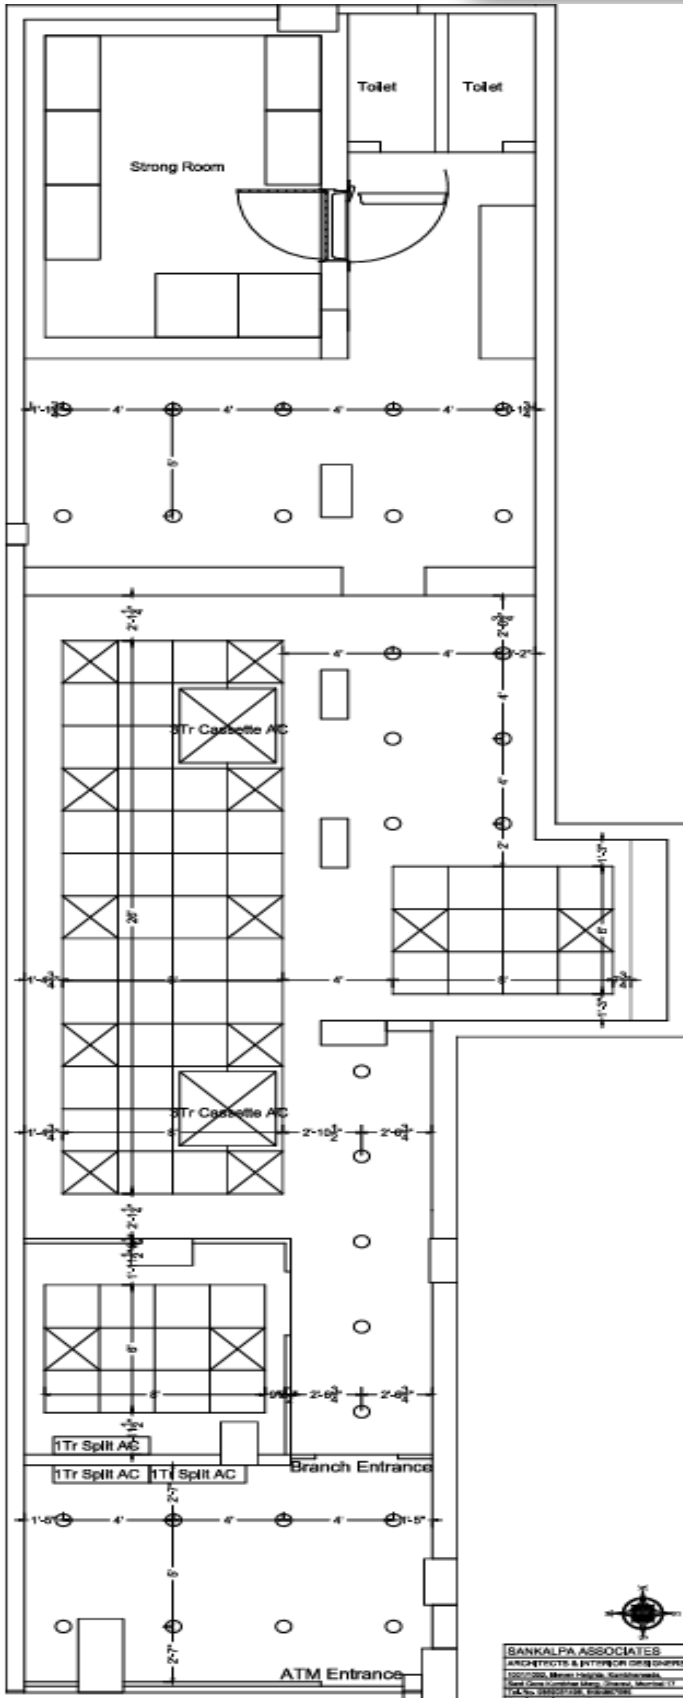

**INTERIOR LAYOUT OF PROPOSED PREMISES
FOR VASHI BRANCH FOR INDIAN BANK**

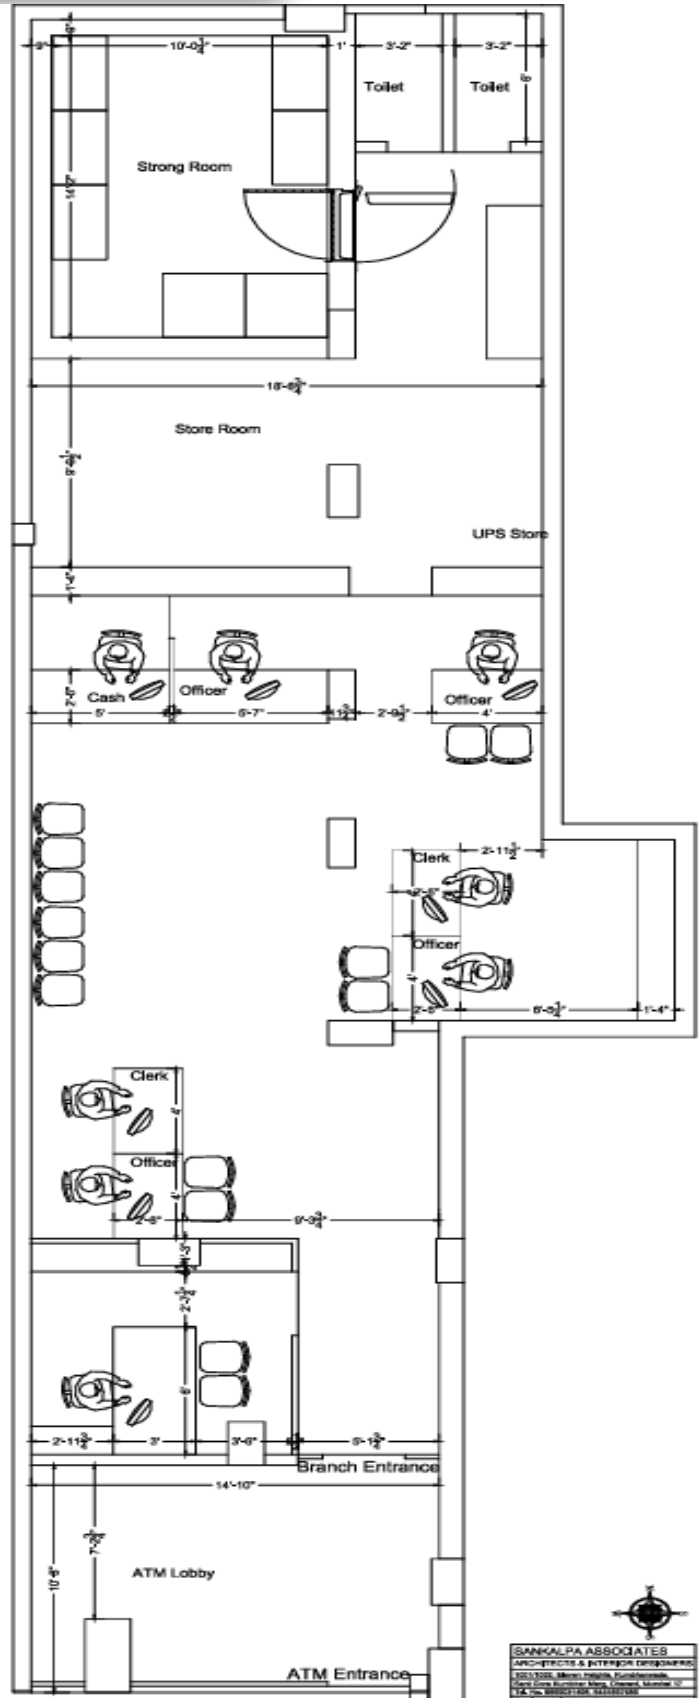

**INTERIOR LAYOUT OF PROPOSED PREMISES
FOR VASHI BRANCH FOR INDIAN BANK**

इंडियन बैंक



Indian Bank

 इलाहाबाद

ALLAHABAD